




IP65

Light line Slim -Top/Side

Led flessibile da 5 metri con luminosità uniforme, realizzato in elastomero siliconico coestruso, termodissipante.

LED profile of 5 metres in length with uniform brightness, made of coextruded silicone, thermo-dissipating.

Profil LED de 5 mètres lumineux en techno polymère avec une luminosité uniforme, bonne dissipation thermique avec des LED de haute qualité.

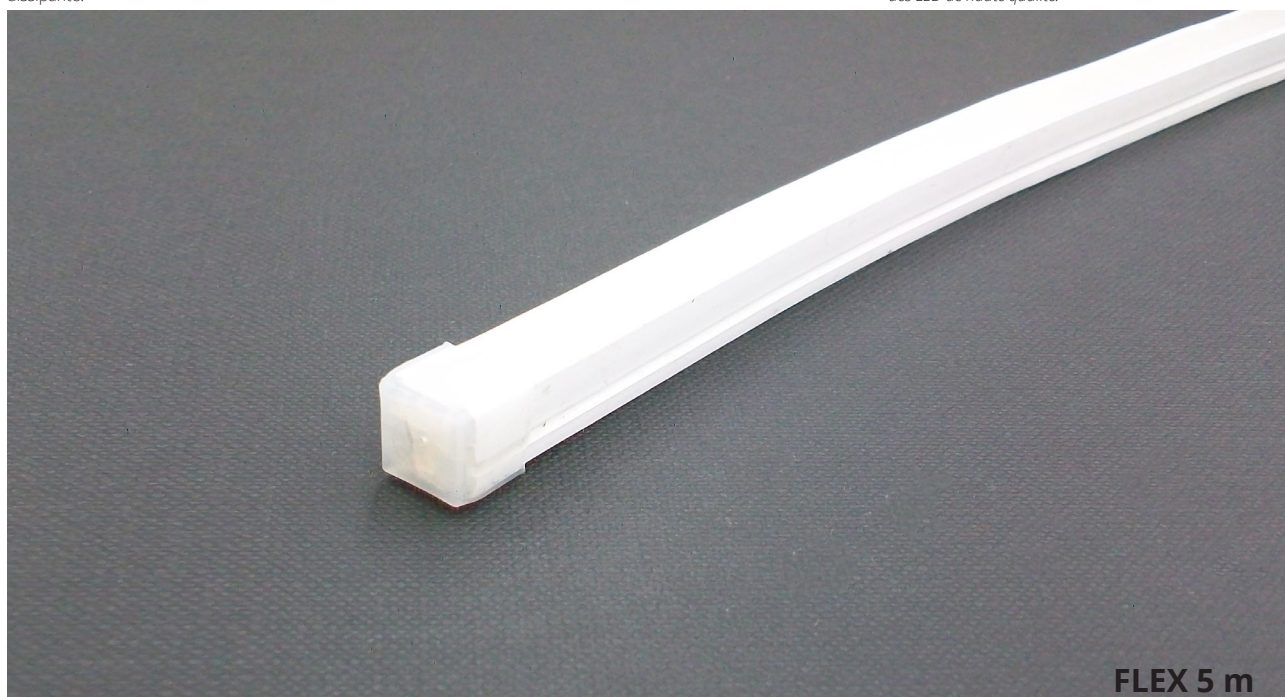

Top - Led

24 VDC
9 W/m
real - 470 Lm/m
CRI>80 - RG0
L80B20 - 50000 h (25°)
A++
Dimmable

8445.24.3200

8445.24.4000



Piegatura superiore
Top bending
Supérieure flexion

LED colour

3200 °K White

4000 °K White

TOP



Side - Led

24 VDC
9 W/m
real - 470 Lm/m
CRI>80 - RG0
L80B20 - 50000 h (25°)
A++
Dimmable

8447.24.3200

8447.24.4000




Piegatura laterale
Side bending
Latérale flexion

LED colour

3200 °K White

4000 °K White

SIDE



Uscita Cavo
Cable Outlet
Sortie du câble




8445P2

Canalina profilo in alluminio L.2M
L.2M Aluminium profile channel
Support de Profilé en aluminium L.2M



8445S

Squadretta in alluminio verniciata bianca
Bracket in white painted aluminum
Aluminum stand painted white



8445T

Coppia di tappi in silicone
Pair of silicone caps
Paire de bouchons en silicone